



# TRULINE® HP & TS SOFFIT


Soffit that breathes.



Engineered for ultimate ventilation, TruLine is a performance-driven soffit designed to maximize the amount of airflow. Developed using our exclusive ADT19 boundary-pushing performance process, TruLine is one of the most effective soffits available on the market.

<b>NFA (Net Free Area)</b>	19.6 - 12" Full Vent 19.1 - 16" Full Vent 12.0 - D5 & D6 Full Vent 9.9 - 16" Center Vent 59. - 12" Center Vent
<b>Construction</b>	Bridge Lances
<b>Coating</b>	Q800 TuffTech™
<b>Material</b>	Alu. - 0.019" & 0.016"
<b>Recyclability</b>	100%
<b>Venting</b>	Full Vent, Center & Solid
<b>Dimensions</b>	4 Width Options 12 ft Lengths
<b>Warranty</b>	Lifetime Limited


By adding passes through our soffit machines that punch the vents and then flatten the peaks to provide a smoother surface without sacrificing ventilation.



QE vs. Typical Lanced Aluminum Soffit

Deep, crescent shaped vents provide the required airflow intake consistently.

TruLine® HP & TS-Series  
12", 16", Double 5" and 6" Soffit

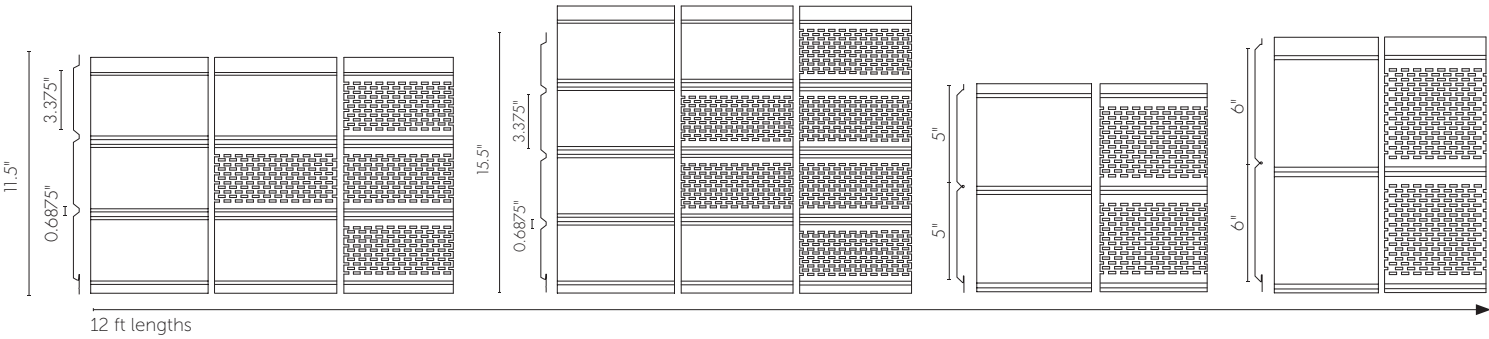

AVAILABLE OPTIONS

- |   |   |
|---|---|
| 12", 0.019" HP - Solid - S<br>Center Vent - CV<br>Full Vent - SV        | 12", 0.016" TS - Solid - S_BLDR<br>Center Vent - CV_BLDR<br>Full Vent - SV_BLDR |
| 16", 0.019" HP - Solid - 16SS<br>Center Vent - 16SCV<br>Full Vent - 16V | 16", 0.016" TS - Solid - 16SS_BLDR<br>Center Vent - 16SCV_BLDR                  |
| Double 5", 0.019" - Solid - D5SS<br>Full Vent - D5VS                    |   |
| Double 6", 0.019" - Solid - D6SS<br>Full Vent - D6VS                    |   |

MATERIAL AVAILABILITY

Aluminum

COATING

Q800 TuffTech™

THICKNESS

0.019" & 0.016"

NFA

- 19.6 - 12" Full Vent
- 19.1 - 16" Full Vent
- 12.0 - D5" & D6" Full Vent
- 9.9 - 16" Center Vent
- 5.9 - 12" Center Vent

WARRANTY

Lifetime Limited Warranty

INSTALLATION NOTES

For installation, (0.375") 3/8" Mitre Divider, F- and J-Channel are needed. Go to [QualityEdge.com/Resources](http://QualityEdge.com/Resources) for detailed installation information.


BUILDING CODES AND BEST PRACTICES

"Proper ventilation [more in-take through soffit than exhaust through roof vents] can lower the attic temperature by as much as 50°F, which significantly reduces the home's heating and cooling demands. Ridge and soffit vents help keep the attic space well-ventilated, preventing a build-up of moisture and reducing heat in summer. These vents can prolong the life of the roof."

Typical one foot soffit overhangs should have at least an 11 NFA, so when used on both sides of the home will have a combined NFA of 22 to draw the air flow needed to work with a ridge vent system.

SOURCE: U.S. Department of Energy  
[https://web.archive.org/web/20120925234940/http://www1.eere.energy.gov/buildings/openhouse/soffit\\_vents.html/#](https://web.archive.org/web/20120925234940/http://www1.eere.energy.gov/buildings/openhouse/soffit_vents.html/#)

SYSTEM COLORS

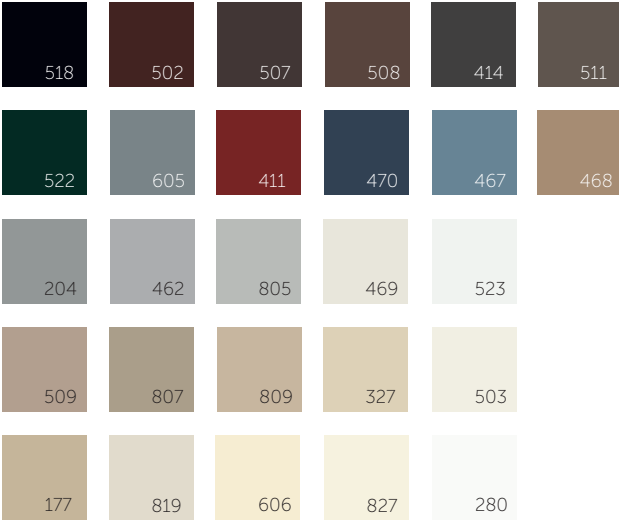

ADDITIONAL COLORS



**ALUMINUM SYSTEM COLORS:** 518 Black [BLK], 502 Brown [B], 507 Mocha [MOC], 508 Musket [MUS], 414 Ironstone [IRNS], 511 Terratone [TER], 522 Forest [FOR], 605 Eldridge Gray [EG], 411 Cottage Red [CRED], 470 Midnight Blue [MNBLU], 467 Evening Shade [EVES], 468 Fawn [FAWN], 204 Granite [GRT204], 462 Silver Lining [SVRL], 805 Pewter [P805], 469 Fresh Canvas [FCAN], 523 Snowmist [SMT], 509 Norwood [NOR], 807 Clay [C], 809 Wicker [WIC], 327 Desert Tan [DTAN], 503 Eggshell [EGG], 177 Sandy Beige [SB177], 819 Herringbone [HER], 606 Cozy Cottage [CC], 827 Champagne [CAB], 280 White [W]

**ADDITIONAL COLORS:** 505 Green [GRE]

Although we make every effort to ensure color accuracy in our printing process, your final products may not be an exact match to those displayed.



Contact your Customer Service or Sales Representative to order:  
**888.784.0878**  
[QualityEdge.com/soffit](http://QualityEdge.com/soffit)